



ENR Series

MRI Filters RF Power Line Filters For Medical Shielded Enclosures

Electrical Characteristics

Nominal voltage	0 - 277 V _{AC} - 50/60 Hz
Test voltage (phase to phase)	2100 V _{DC} (2 s)
Test voltage (phase to ground)	2100 V _{DC} (2 s)
Leakage current to ground at 277 Vac 60 Hz 40 °C	< 10 mA

Model	Nom. Voltage [Vac]	Nom. Curr. [A] at TA=40°C	Leakage current [mA]	Case
ENR230	277	30	< 10	1
ENR205	277	5	< 10	1


Attenuation

Model	10 MHZ	1 GHz
ENR230	> 100 dB	> 100 dB
ENR205	> 100 dB	> 100 dB



Mechanical Dimensions in mm

Case 1

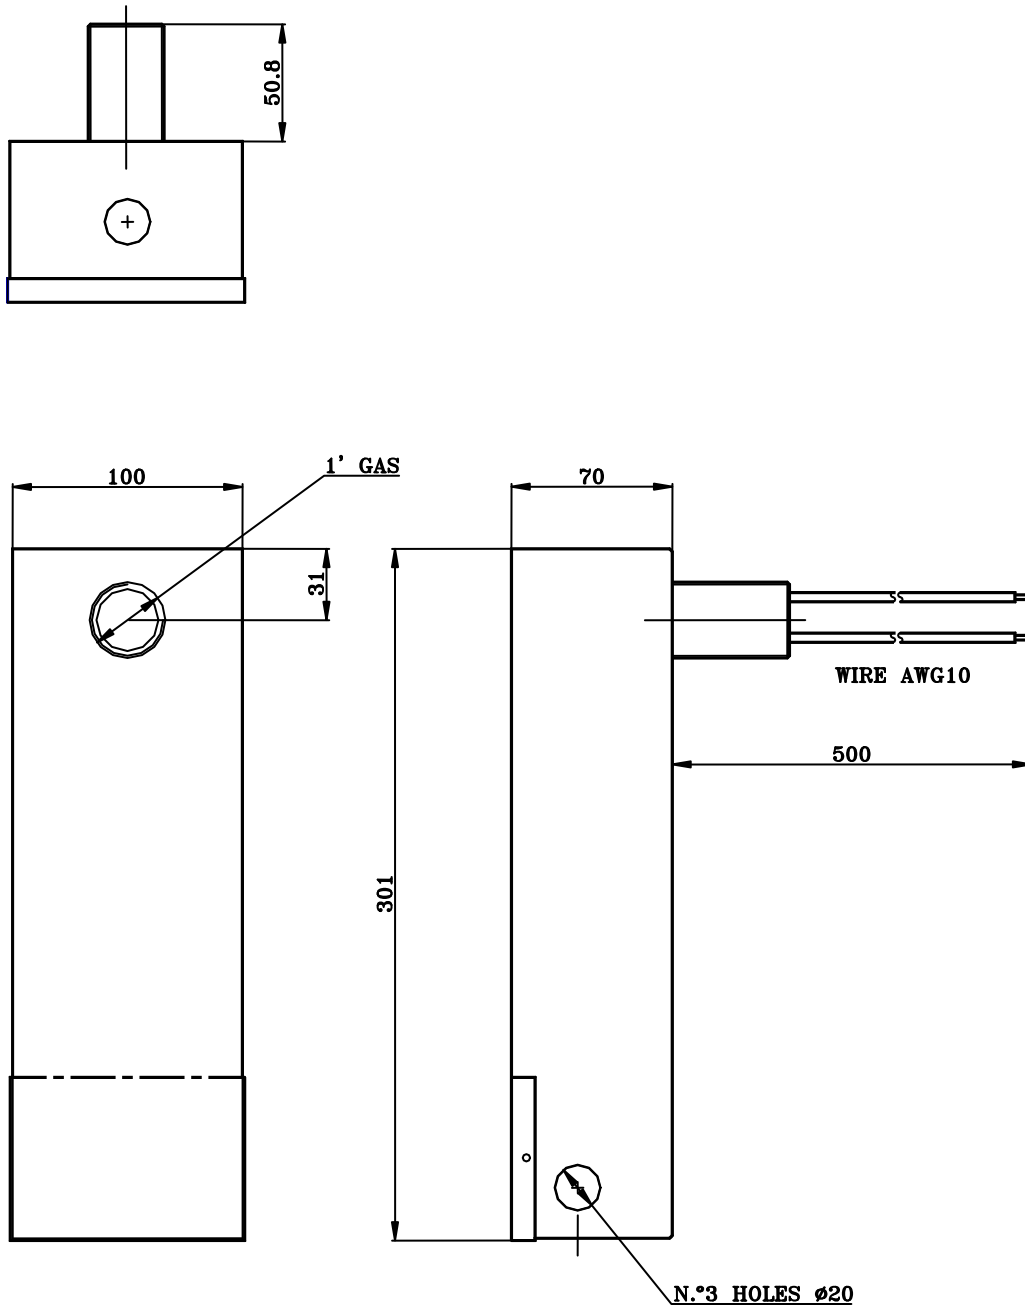

All dimensions are in mm.

